



## WTMT Pico & Micro De/Soldering Tweezer



- + Unique 2-in-1 Desoldering Tweezers, 80 W, 12 V:  
Supports Pico & Micro Tweezers Tips for usage under the microscope.  
(Save one Tweezers Tool)
- + Extremely short heat-up time: 5 sec.
- + Maximum precision during the soldering process with short tip-to-grip distance and optimized tip design.
- + Precise positioning ensured with unique parallel sliding block guide.
- + Fastest Tweezers Tip Change
- + Ergonomics: Improved comfort and safe handling with new ergonomic soft grips
- + Compatible with:  
WT 2M / WR 3M Control unit;  
WSR 211 Safety Rest;  
RTWMS / RTWPS Desoldering Tip Range



**WTMT**  
WTMT Micro De/Soldering Tweezer  
(hand piece without tips)  
2 x 40 W, 12 V  
Order No. T0051321199

**WTMT Set**  
WTMT incl. WTMT Tweezers, 80 W, 12 V,  
RTWMS 030 K Tips (2 x 40 W)  
and WSR 211 Safety Rest  
(RTWMS/RTWPS Tip type series)  
Order No. T0051321499

## RTWPS Smart Pico Tweezers Tips

- + High performance tips for the smallest components: 0402 down to 01005
- + Short tip-to-grip distance
- + MIL-SPEC / IPC standard (potential free, MS versions)



Model	Watt	a / b (mm) (inch.)	Order No.
RTWPS 001 C MS	2 x 40	∅ 0,1 ∅ 0.004	T0050115499
RTWPS 001 C X HM	2 x 40	∅ 0,1 ∅ 0.004	T0050115599




Model	Watt	a / b (mm) (inch.)	Order No.
RTWPS 002 S X	2 x 40	0,2 x 0,1 0.008 x 0.004	T0050115699
RTWPS 002 S X HM	2 x 40	0,2 x 0,1 0.008 x 0.004	T0050115799

● not wettable

## RTWMS Smart Micro Tweezers Tips

- + High performance active tips for micro and standard
- + MIL-SPEC / IPC standard (potential free, MS versions)

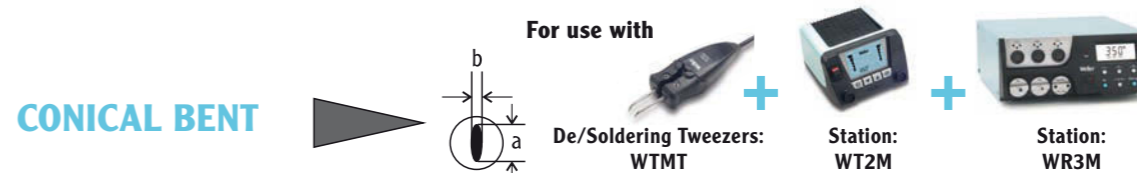


Model	Watt	a / b (mm) (inch.)	Order No.
● RTWMS 001 C NW X	2 x 40	∅ 0,1 ∅ 0.004	T0050116699
RTWMS 004 C X	2 x 40	∅ 0,4 ∅ 0.016	T0050115899



Modell	Watt	a / b (mm) (inch.)	Order No.
RTWMS 007 S X	2 x 40	0,7 x 0,4 0.027 x 0.016	T0050115999
RTWMS 013 S	2 x 40	1,3 x 0,4 0.051 x 0.016	T0050116299
RTWMS 008 S	2 x 40	0,8 x 0,4 0.031 x 0.016	T0050116799



Model	Watt	a / b (mm) (inch.)	Order No.
RTWMS 030 K	2 x 40	3,0 x 1,0 0.118 x 0.039	T0050116099
RTWMS 060 K	2 x 40	6,0 x 1,0 0.236 x 0.039	T0050116199
RTWMS 100 K	2 x 40	10,0 x 1,0 0.394 x 0.039	T0050116499
RTWS 150 K	2 x 40	3,0 x 1,0 0.118 x 0.039	T0050116399
RTWMS 060 K	2 x 40	6,0 x 1,0 0.236 x 0.039	T0050116599

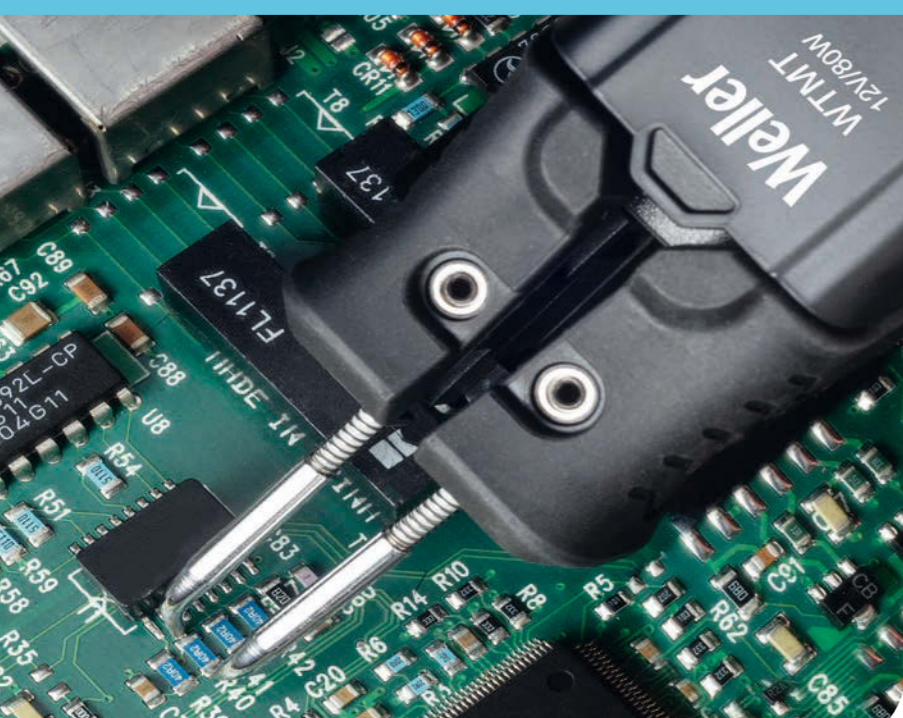

**Active Tip**

**Heat up time**

°C

RTWPS 3 sec \*

RTWMS 5 sec \*

**Component size**

XS to L

\*from 50°C to 350°C / 120°F to 620°F

# Weller

weller-tools.com

# TWEEZERS

WTLine

