


## Laser Line LL 200V

Item No: FT91001699N

Laser extraction unit, 230V / 50 Hz

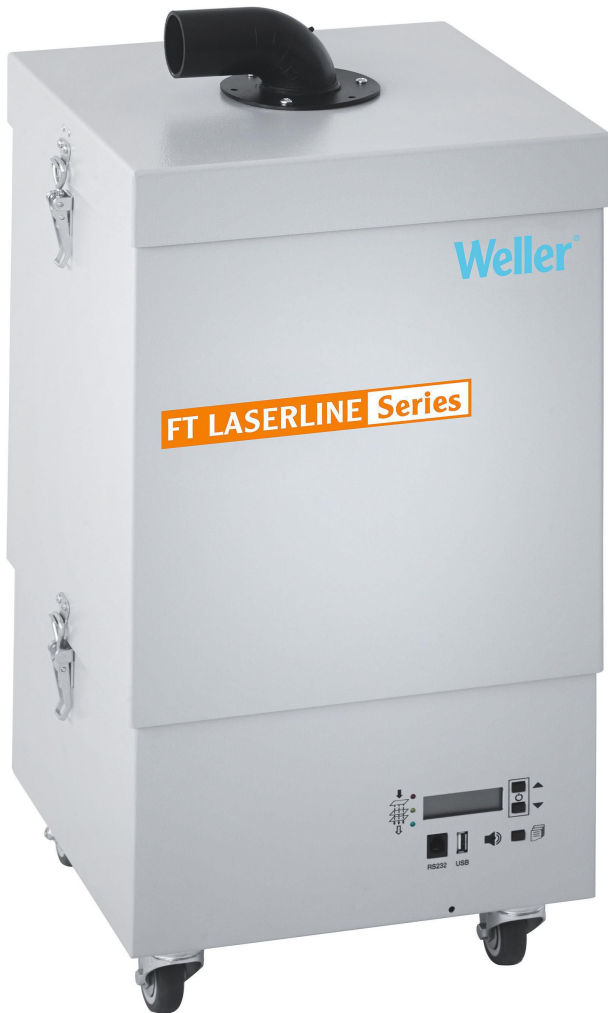

## KEY FEATURES

- + For Laser marking, engraving, and welding applications with low up to mid dust volumes.
- + The Constant flow control (CFC) guarantees a automatic air flow regulation independent of the filter pollution rate.
- + Efficiency test via USB port
- + Acoustical and optical filter alarm
- + Low noise level
- + Pre-filter 0,5 -2,5 m<sup>2</sup>
- + Includes main filter - FT91000008N

## TECHNICAL DATA

Height	700mm
Length	320mm
Dimensions L x W x H	320.0 x 320.0 x 700.0mm
Capacity (m <sup>3</sup> /h)	230 m <sup>3</sup> /h
ESD Safe	Yes
Maximum Vacuum	3,800 Pa
Power	200 VA
UPC	4003019431267
Product Family	Laser Fume Filtration