

RT Pico Tips



RT Micro Tips



RT Ultra Tips




+ High performance
Component size XS to S
Heat up time 3 Sec.*
For use with
Soldering Iron: WXPP MS
Station: WX

+ Versatile Performance
Component size M to L
Heat up time 5 Sec.*
For use with
Soldering Iron: WXMP MS / WMRP MS
Station: WX / WT

+ Maximum Power
Component size XL to XXL
Heat up time 7 Sec.*
For use with
Soldering Iron: WXUP MS
Station: WX

	Article	a / b (mm) (inch)	Lenght (mm) (inch.)
Conical	RTP 001 C MS T0050101399	0.1 0.004	7.9 0.705
	RTP 001 C NW MS T0050101499	0.1 0.004	17.9 0.705
	RTP 002 C MS T0050101599	0.2 0.008	16.3 0.642
	RTP 004 C MS T0050101699	0.4 0.016	16.3 0.642
	RTP 001 C X MS T0050101799	0.4 0.016	20.6 0.811
	RTP 002 C X MS T0050101899	0.1 0.004	20.6 0.811
Bevel Cut	RTP 004 B MS T0050101999	0.4 0.016	16.3 0.642
	RTP 012 B MS T0050102099	1.2 0.047	16.3 0.642
Chisel	RTP 002 S MS T0050102199	0.2 / 0.1 0.008 / 0.004	16.3 0.642
	RTP 002 S NW MS T0050102299	0.2 / 0.1 0.008 / 0.004	16.3 0.642
	RTP 004 S MS T0050102399	0.4 / 0.2 0.016 / 0.008	16.3 0.642
	RTP 008 S MS T0050102499	0.8 / 0.3 0.031 / 0.012	16.3 0.642
	RTP 010 S MS T0050102599	1.0 / 0.3 0.039 / 0.012	16.3 0.642
	RTP 013 S MS T0050102699	1.3 / 0.3 0.051 / 0.012	16.3 0.642
RT Micro Tips	RTM 001 C NW MS T0054462571N	0.1 0.004	19.0 0.748
	RTM 002 C MS T0054461499N	0.2 0.008	19.0 0.748
	RTM 002 C L MS T0050100199	0.2 0.008	18.7 0.736
	RTM 004 C X MS T0054463399N	0.4 0.016	26.0 1.024
	RTM 005 C X MS T0054463299N	0.5 0.019	26.0 1.024
	RTM 008 C MS T0054461799N	0.8 0.031	18.0 0.709
	RTM 004 B MS T0050100399	0.4 0.016	18.5 0.728
	RTM 012 B MS T0054462099N	1.2 0.047	18.0 0.709
	RTM 003 S NW MS T0054462671N	0.3 / 0.1 0.012 / 0.004	19.0 0.748
	RTM 004 S MS T0054461599N	0.4 / 0.15 0.016 / 0.006	19.0 0.748
	RTM 006 S MS T0050100499	0.6 / 0.4 0.024 / 0.016	23.0 0.906
	RTM 008 S MS T0054462399N	0.8 / 0.4 0.031 / 0.016	23.0 0.906
	RTM 008 S X MS T0054461999N	0.8 / 0.4 0.031 / 0.016	23.0 0.906
	RTM 010 S MS T0050100699	1.0 / 0.3 0.039 / 0.016	18.0 0.709
RT Ultra Tips	RTU 004 C MS T0050104999	0.4 0.016	27.5 1.083
	RTU 008 C MS T0050105099	0.8 0.031	29.0 1.142
	RTU 016 C MS T0050105199	1.6 0.063	27.5 1.083
	RTU 004 C X MS T0050105299	0.4 0.016	39.2 1.543
	RTU 008 C X MS T0050105399	0.8 0.031	39.2 1.543
	RTU 016 C X MS T0050105499	1.6 0.063	39.2 1.543
	RTU 020 B MS T0050105599	2.0 0.079	29.0 1.142
	RTU 035 B MS T0050105699	3.5 0.138	29.0 1.142
	RTU 050 B MS T0050105799	5.0 0.197	30.0 1.181
	RTU 015 S MS T0050105899	1.5 / 0.4 0.059 / 0.016	28.0 1.102
RT Ultra Tips	RTU 022 S MS T0050105999	2.2 / 0.6 0.087 / 0.024	28.0 1.102
	RTU 032 S MS T0050106099	3.2 / 0.8 0.126 / 0.031	27.5 1.083
	RTU 032 S L MS T0050106199	3.2 / 0.8 0.126 / 0.031	34.0 1.339
	RTU 050 S MS T0050106299	5.0 / 1.2 0.197 / 0.047	27.5 1.083
	RTU 076 S MS T0050106399	7.6 / 1.5 0.299 / 0.059	28.0 1.102
	RTU 093 S MS T0050106499	9.3 / 2.0 0.366 / 0.079	28.0 1.102
	RTM 013 S MS T0054461699N	1.3 / 0.5 0.051 / 0.016	19.0 0.748
	RTM 013 S X MS T0054460373N	1.3 / 0.5 0.051 / 0.016	28.0 1.102
	RTM 015 S MS T0054461899N	1.5 / 0.4 0.059 / 0.016	18.0 0.709
	RTM 018 S MS T0050100899	1.8 / 0.4 0.071 / 0.016	18.0 0.709
RT Micro Tips	RTM 022 S MS T0054462299N	2.2 / 0.4 0.087 / 0.016	18.0 0.709
	RTM 032 S MS T0050101099	3.2 / 0.9 0.126 / 0.035	17.5 0.689
	RTM 036 S MS T0054463199N	3.6 / 0.9 0.141 / 0.035	18.0 0.709
	RTM 025 K MS T0050101299	2.5 0.098	19.0 0.748
RT Micro Tips	RTM 030 K MS T0054462199N	3.0 0.118	19.0 0.748
	RTM 020 G MS T0054462499N	2.0 0.079	20.0 0.787
RT Ultra Tips	RTU 020 G MS T0050106599	2.0 0.079	28.0 1.102
	RTU 100 K MS T0050106699	10.0 0.393	27.0 1.063
RT Ultra Tips	RTU 160 K MS T0050106799	16.0 0.630	27.0 1.063
	RTU 200 K MS T0050106899	20.0 0.078	27.0 1.063
RT Ultra Tips	RTU 330 K MS T0050106999	33.0 1.299	27.0 1.063

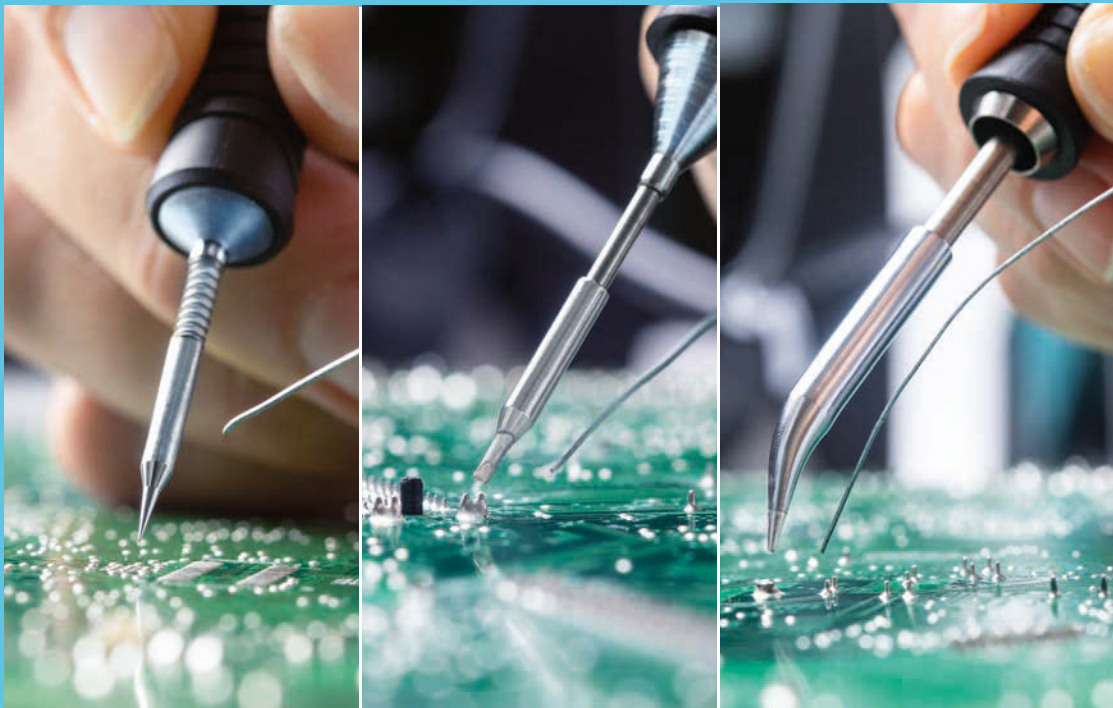

RT Pico tips
40 watts

RT Micro tips
40 watts (55 watts)

RT Ultra tips
150 watts

NO COMPROMISE.
PRECISION. PERFORMANCE. POWER.
EXPLORE THE NEW ACTIVE SOLDERING TIP RANGE

Knife	RTP 010 K MS T0050102799	1.0 / 0.2 0.039 / 0.008	15.9 0.626
	RTP 010 K NW MS T0050102899	1.0 0.039	15.9 0.626
	RTP 025 K MS T0050102999	2.5 / 0.3 0.098 / 0.012	17.3 0.681
Gullwing	RTP 020 G MS T0050103099	2.0 0.079	15.9 0.626

Measuring tip	RTM 028 X T0054461399N	26.0 1.024
---------------	---------------------------	---------------

Blade	RTU 100 K MS T0050106699	10.0 0.393	27.0 1.063
	RTU 160 K MS T0050106799	16.0 0.630	27.0 1.063
	RTU 200 K MS T0050106899	20.0 0.078	27.0 1.063
	RTU 330 K MS T0050106999	33.0 1.299	27.0 1.063

* from 50 °C to 350 °C / 120 °F to 620 °F

● not wettable

Weller

weller-tools.com

Discover more



Weller and the Weller logo are registered trademarks of Apex Brands, Inc.
T0055749600 / 03.2024